

BATTERY CHARGER

5 Stage Intelligent Chargers




Prices as of 1st June 2010

Model No.	DC Input	Charge Current	\$RRP inc GST
DC-1230	12V	30A	\$ 792

OPTIONS

Code	Description	RRP Inc GST
R	Ruggedisation	\$ 44
G	Conformal Coating	\$ 110

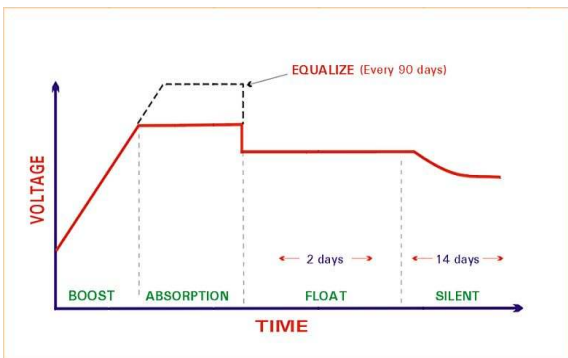

Features

- Selectable Battery Types
- Temperature Compensation
- Status Indicators
- DC Circuit Breaker / Battery Isolator Switch
- No Spark – Battery Connection
- Full Electronic Protection
- 5 Stage Intelligent Charging
- Designed & Manufactured in Australia
- High Efficiency Toroidal Transformer
- Galvanically Isolated
- Rugged Construction

Specifications

DC Voltage	12V & 24V
Input Voltage	240 Vac +/- 5%
Input Frequency	45 – 65 Hz
Operating Temperature	-10°C to +50°C
Battery Leads	1m Long with 10mm Mounting Lugs
Battery Types	Flooded, Gel, AGM, Lead Calcium (Selectable)
Cooling	Thermostatically Controlled Fan
Standards	AS60335.2.29, EN55014, C-Tick
Protection circuitry	Overtemperature, Overload/Short Circuit, Reverse Polarity
Dimensions	260 mm x 160 mm x 100 mm
Warranty	2 Years



LATRONIC SUNPOWER PTY LTD

TEL 61 7 5491 6988
 FAX 61 7 5491 6792
 EMAIL sales@latronics.com
 WEB www.latronics.com



Made in Australia